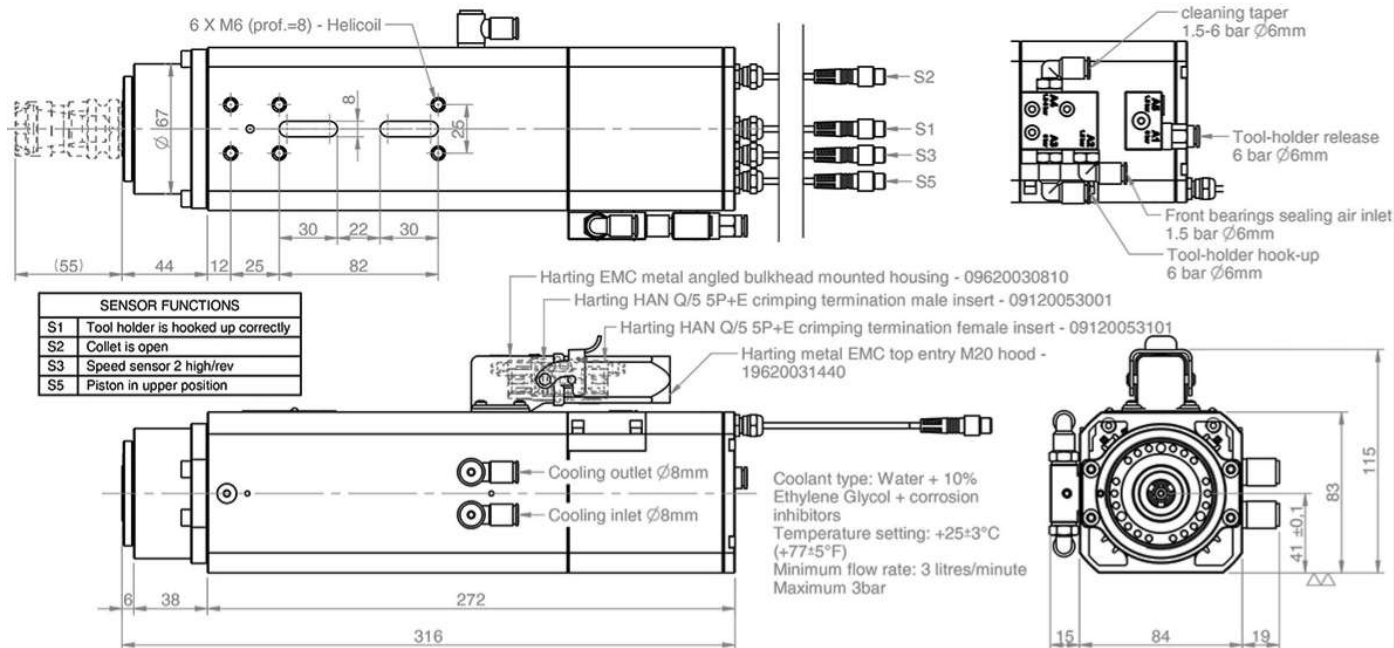


PLUG CONNECTION
pin #1: PTC
pin #2: PTC
pin #3: U
pin #4: V
pin #5: W

Power [kW]	Duty Cycle	Base speed [rpm]	Base freq. [Hz]	Base voltage Δ [V]	Absorb. Δ [A]	Base voltage Y [V]	Absorb. Y [A]
2.2	S1	24000	400	220	8.4		
Power [kW]	Duty Cycle	Base speed [rpm]	Base freq. [Hz]	Base voltage Δ [V]	Absorb. Δ [A]	Base voltage Y [V]	Absorb. Y [A]
Min speed [rpm]		Max speed [rpm]	Max freq. [Hz]	Protection	Ins. Cl.	Part number on nameplate	
6000		30000	500	IP54	F	COMTC410007	
Balancing according to ISO 1940 - G2.5 @ 30000 rpm		Balancing type		Tool type	Tool type	Peso / weight	
						6.63 kg	
rev. n°	description					date	signature
00	Emissione					28/02/2020	D. Bottarel
drawn - date		approved - date		checked - date		sostituisce il	
Dario Bottarel - 28/02/2020		S. Perli - 28/02/2020		S. Perli - 28/02/2020		sostituito dal	

TEKNOMOTOR

Teknomotor S.r.l.
Via Argemone 31, I-32038 Quaro Vaso (BL)
www.teknomotor.com

Model
ATC41-C-2DB-ISO20-SN-HY-LC

Customer
Catalogo

Drawing code
COMTC410007

Tolleranze non quotate: UNI EN 22769 B1
Smussi non quotati: 0.5 mm
Fugosità secondo UNI ISO 1302

figlio / sheet
1/1

scala
n.d.

A4

Il presente disegno è di proprietà esclusiva di Teknomotor S.r.l. La riproduzione totale o parziale e la divulgazione a terzi, senza nostra esplicita concessione scritta, verrà perseguita secondo i termini di legge in vigore.