



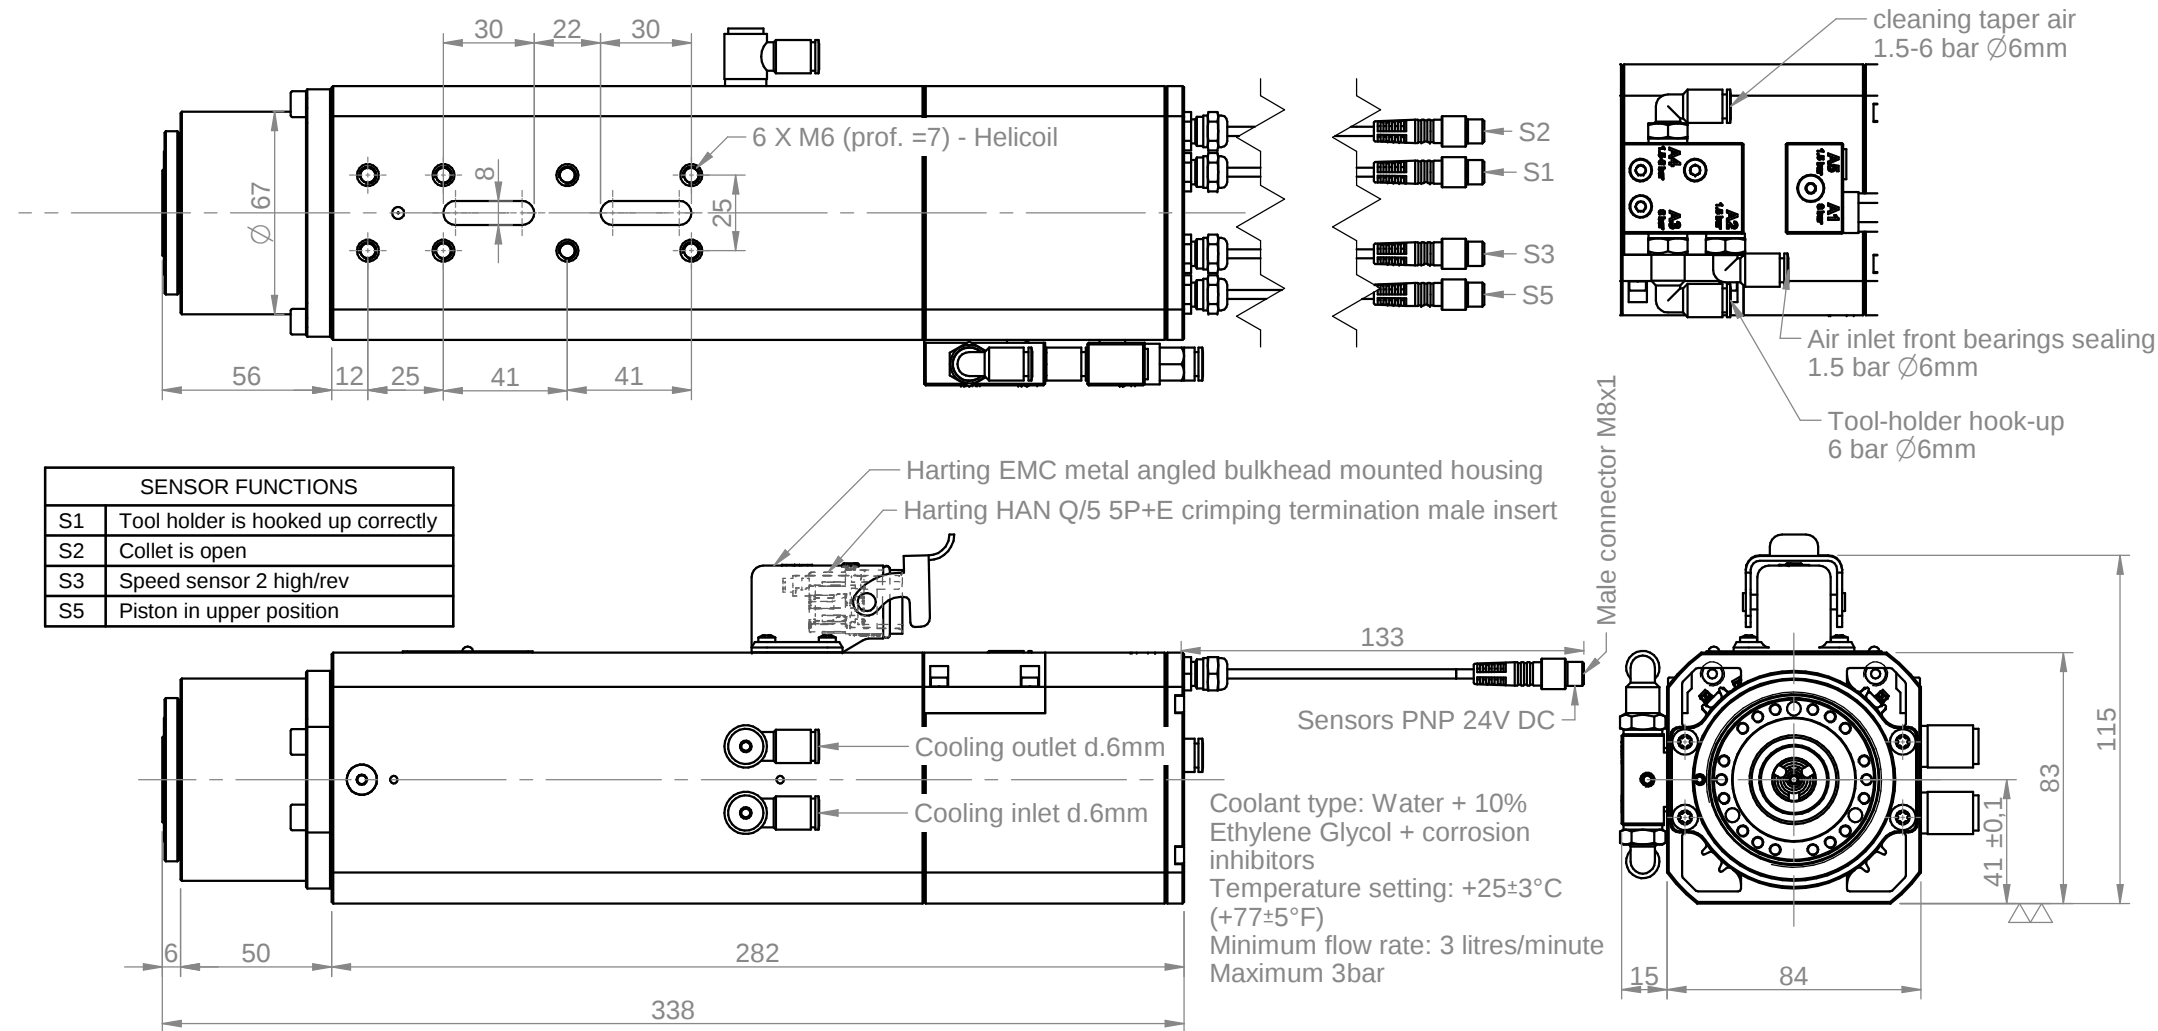

PLUG CONNECTION

pin #1: PTC
pin #2: PTC
pin #3: U
pin #4: V
pin #5: W

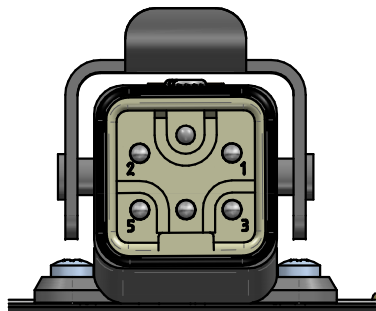

Power [kW] 2.2	Duty Cycle S1	Base speed [rpm] 24000	Base freq. [Hz] 400	Base voltage Δ [V] 220	Absorb. Δ [A] 8.4	Base voltage Y [V]	Absorb. Y [A]	 Teknomotor S.r.l. Via Argenega 31, I-32038 Quero Vas (BL) www.teknomotor.com			
Power [kW]	Duty Cycle	Base speed [rpm]	Base freq. [Hz]	Base voltage Δ [V]	Absorb. Δ [A]	Base voltage Y [V]	Absorb. Y [A]				
Min speed [rpm] 6000		Max speed [rpm] 40000	Max freq. [Hz] 670	Protection IP54	Ins. Cl. F	Part number on nameplate COMTC410018					
Balancing according to ISO 1940 - G2.5 @ 40000 rpm		Balancing type		tool type 	tool type 	Peso / weight 7,00 kg					
Title ATC41-C-2DB-ISO20-LN-HY-LC											
rev. n° 01	description Modificato velocità massima					date 24/02/2025	signature D. Bottarel	Customer Catalogo	Drawing code COMTC410018		
00	Emissione					11/01/2024	D. Bottarel	Tolleranze non quotate: UNI EN 22768 fH Smussi non quotati: 0.5 mm Rugosità secondo UNI ISO 1302			
drawn - date D. Bottarel - 11/01/2024		approved - date S. Perli - 11/01/2024		checked - date S. Perli - 11/01/2024		sostituisce il		foglio / sheet 1 / 1	scala		A4
						sostituito dal					