

Rotary vane- Vacuumpump dry running



ZIRKON D015 V

0,55-0,66 kW (50 Hz)



0,66-0,72 kW (60 Hz)

Motor: Protection Class IP 55; Insulation Class F

	article code	kW	V	Hz	min ⁻¹	m ³ /h	mbar ,abs	dB(A)	kg
Single Phase	5098010241	0,66	220-240 ~	50	1400	16	120	63	29,5
		0,72	220-240 ~	60	1700	19	120	65	29,5
Three Phase	5098010240	0,55	175-260 △ 300-450 Y	50	1400	16	120	63	27,5
		0,66	200-300 △ 346-520 Y	60	1700	19	120	65	27,5

Dimensions


all dimensions in mm

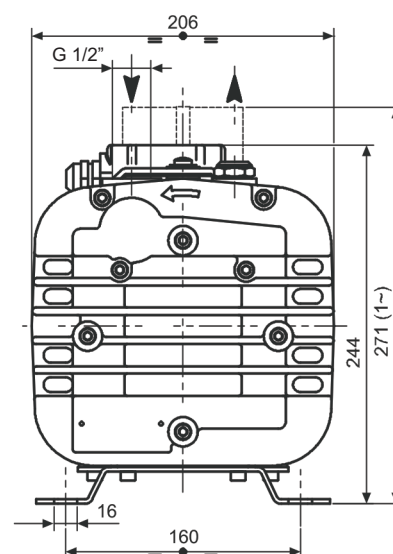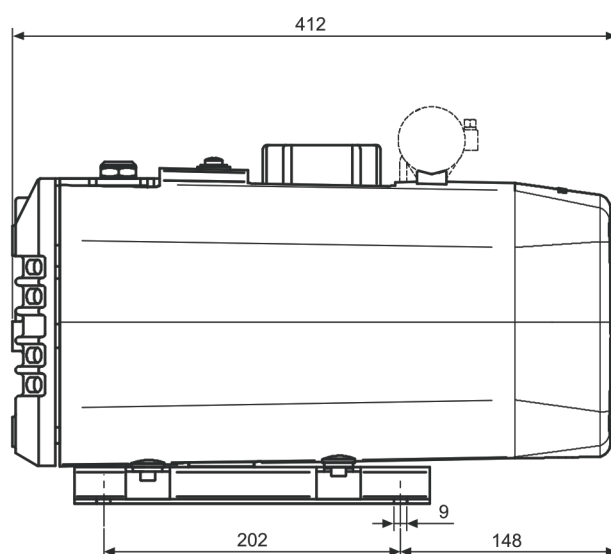

We reserve the right to alter technical information!

briwatec GmbH
Schönauer Strasse 62
D-79669 Zell im Wiesental

Phone +49 (0) 7625 918 868 0
Fax +49 (0) 7625 918 868 33
Email: info@briwatec.de
<http://www.briwatec.de>

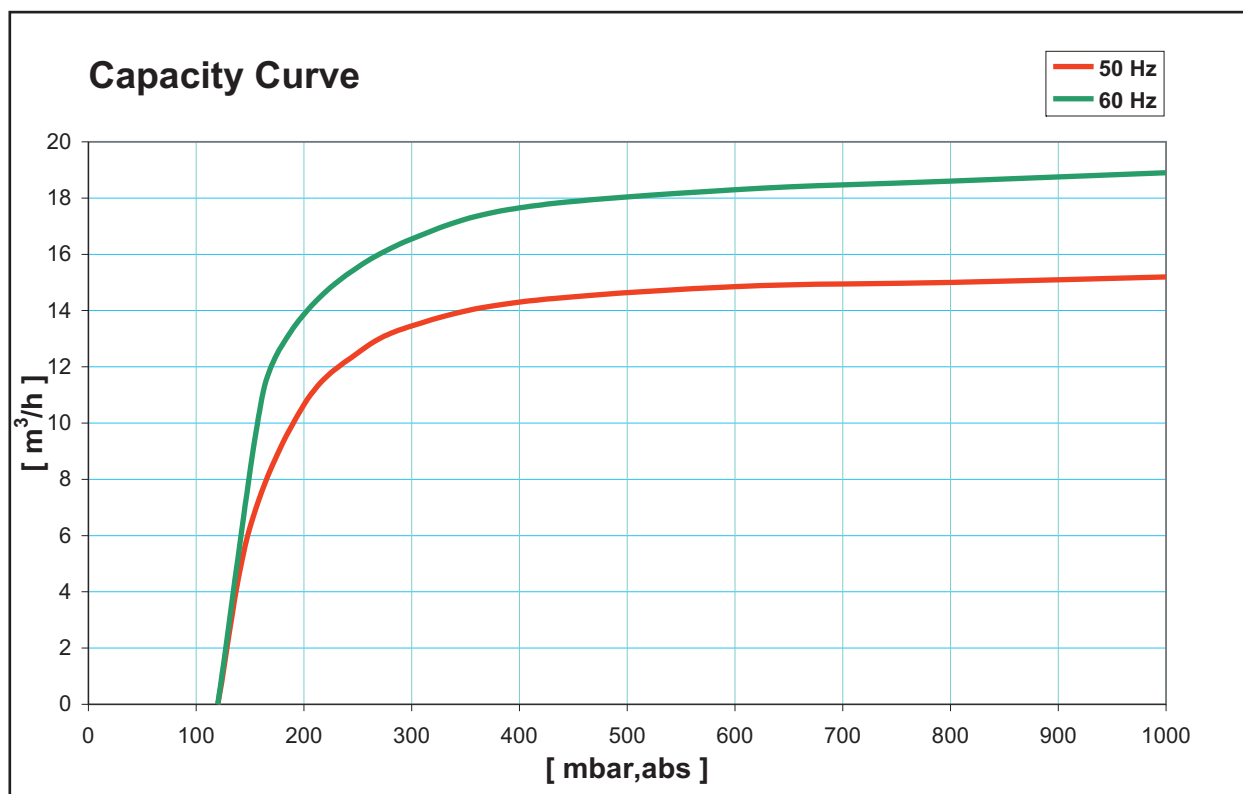

The capacity is related to suction conditions at inlet connection.

We reserve the right to alter technical information!