

Rotary Vane- Vacuumpump dry running



ZIRKON D025 V

0,75 kW (50 Hz)



0,90 kW (60 Hz)

Motor: Protection Class IP 55; Insulation Class F

	article code	kW	V	Hz	min ⁻¹	m ³ /h	mbar ,abs	dB(A)	kg
Single Phase	5098010251	0,75	220-240 ~	50	1400	25	120	65	29
		0,90	220-240 ~	60	1700	29	120	67	29
Three Phase	5098010250	0,75	175-260 △ 300-450 Y	50	1400	25	120	65	28,5
		0,90	200-300 △ 346-520 Y	60	1700	29	120	67	28,5

Dimensions


all dimensions in mm

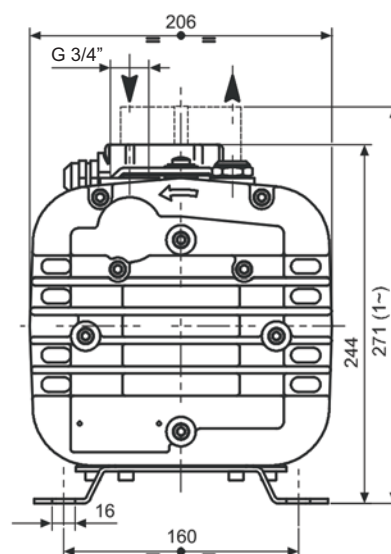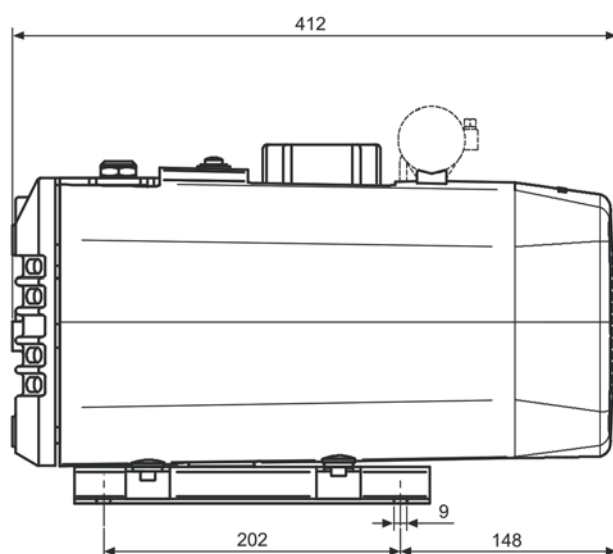

We reserve the right to alter technical information!

briwatec GmbH
Schönauer Strasse 62
D-79669 Zell im Wiesental

Phone +49 (0) 7625 918 868 0
Fax +49 (0) 7625 918 868 33
Email: info@briwatec.de
<http://www.briwatec.de>

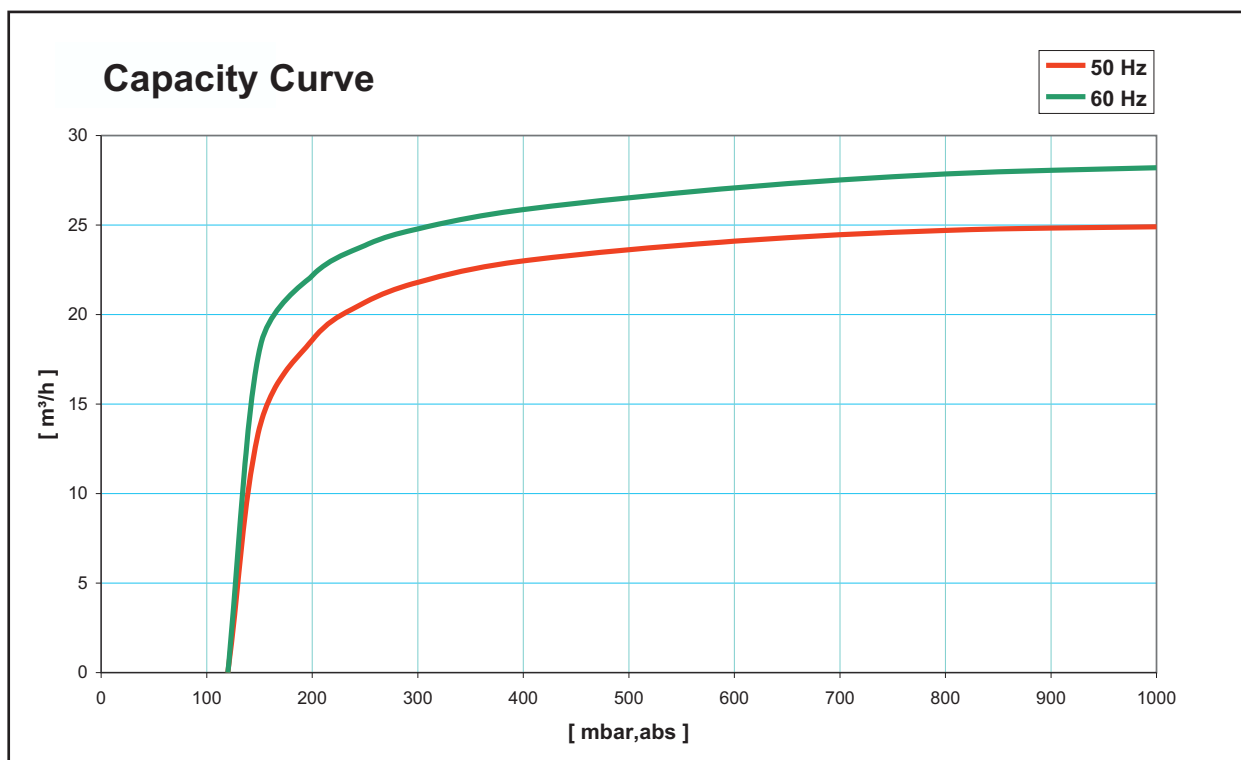

The capacity is related to suction conditions at inlet connection.

We reserve the right to alter technical information!

briwatec GmbH
Schönauer Strasse 62
D-79669 Zell im Wiesental

Phone +49 (0) 7625 918 868 0
Fax +49 (0) 7625 918 868 33
Email: info@briwatec.de
<http://www.briwatec.de>