

Rotary Vane- Vacuumpump dry running





ZIRKON D040 V
1,5 kW (50 Hz)
1,8 kW (60 Hz)

Motor: Protection Class IP 55; Insulation Class F

	article code	kW	V	Hz	min ⁻¹	m ³ /h	mbar ,abs	dB(A)	kg
Single Phase	5098010261	1,5	220-240 ~	50	1400	40	120	68	40
		1,8	220-240 ~	60	1700	46	120	67	40
	on request	1,5	230 ~	50	1400	40	120	68	40
Three Phase	5098010260	1,35	190-200 △ 380-400 Y	50	1445	40	120	68	39
		1,7	200-230 △ 400-460 Y	60	1720-1745	46	120	67	39

Dimensions


all dimensions in mm

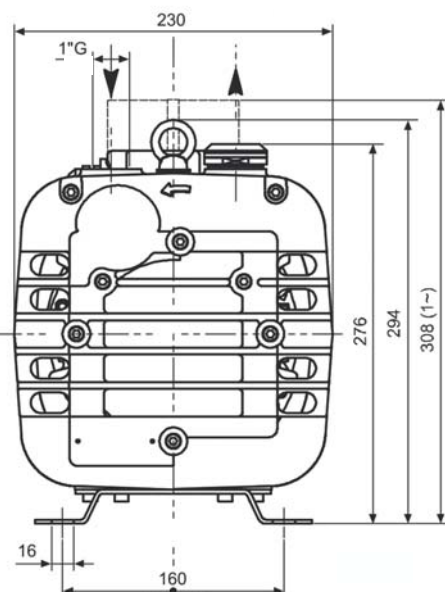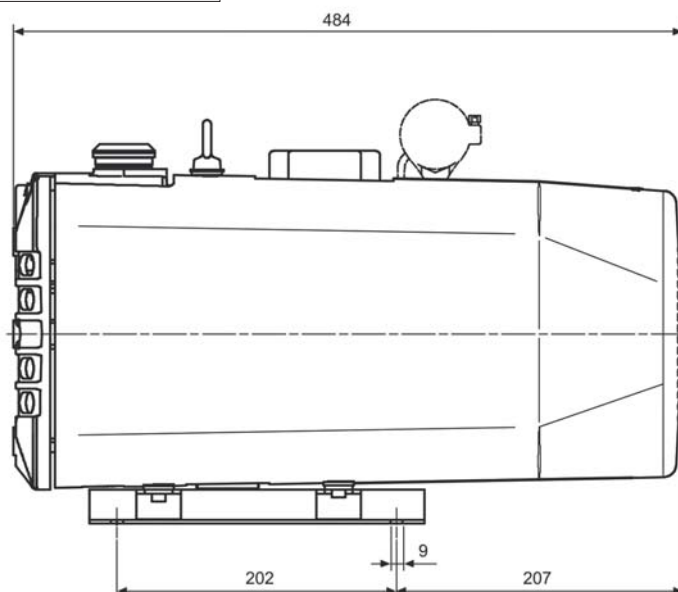

We reserve the right to alter technical information!

briwatec GmbH
Schönauer Strasse 62
D-79669 Zell im Wiesental

Phone +49 (0) 7625 918 868 0
Fax +49 (0) 7625 918 868 33
Email: info@briwatec.de
<http://www.briwatec.de>

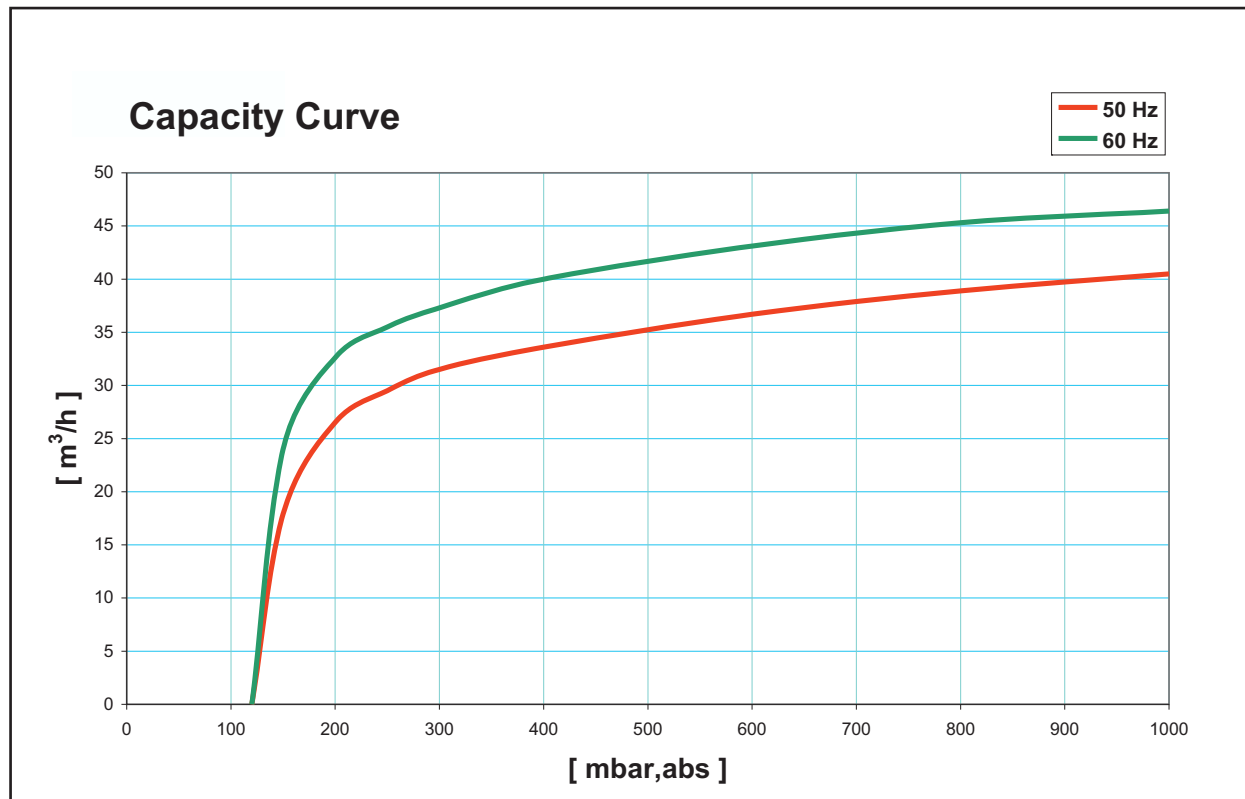

The capacity is related to suction conditions at inlet connection.

We reserve the right to alter technical information!

briwatec GmbH
Schönauer Strasse 62
D-79669 Zell im Wiesental

Phone +49 (0) 7625 918 868 0
Fax +49 (0) 7625 918 868 33
Email: info@briwatec.de
<http://www.briwatec.de>