

Rotary Vane- Vacuumpump oil lubricated



TOPAS D008 V

0,25 kW (50 Hz)



0,30 kW (60 Hz)

Motor: Prot. Cl. IP 55; insulation Cl. F

	article code	kW	V	Hz	min ⁻¹	(m ³ /h)	mbar ,abs	dB(A)	Oil(l)	kg
Single Phase	5096010551	0,25	230 ~	50	2800	8	2	58	0,2	10
	5096010551	0,3	220 ~	60	3300	9	2	60	0,2	10
Three Phase	5096010550	0,25	230△ 400 Y	50	2800	8	2	58	0,2	9
	5096010550	0,3	265△ 460 Y	60	3300	9	2	60	0,2	9

Dimensions

all dimensions in mm

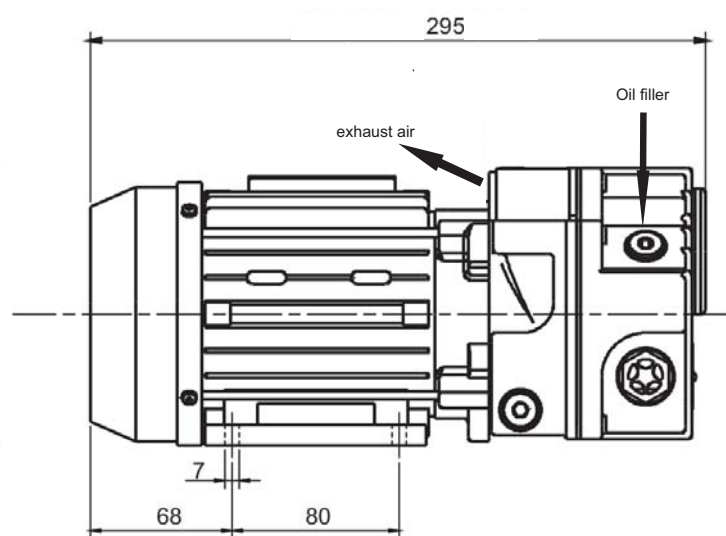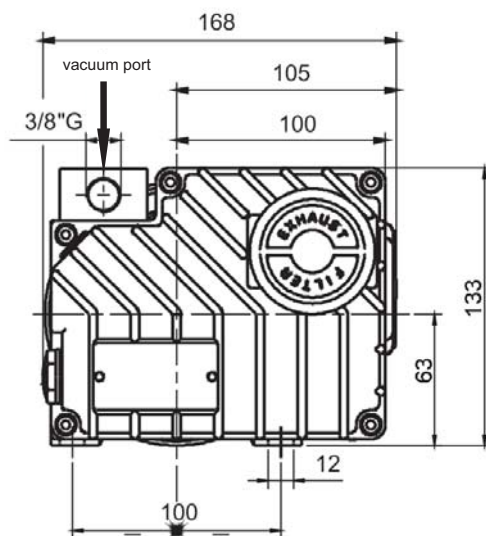


We reserve the right to alter technical information !

briwatec GmbH
Schönauer Strasse 62
D-79669 Zell im Wiesental

Phone +49 (0) 7625 918 868 0
Fax +49 (0) 7625 918 868 33
Email: info@briwatec.de
<http://www.briwatec.de>

TOPAS D008 V

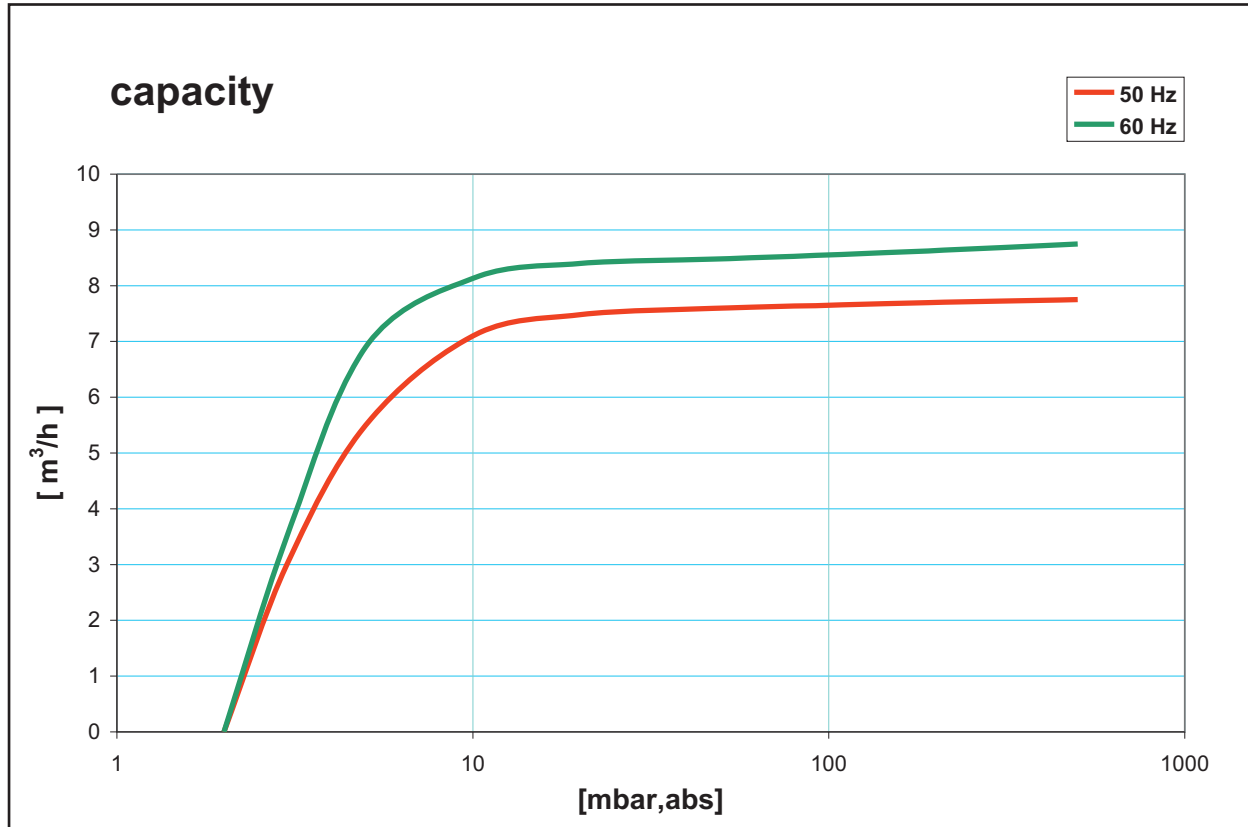

The capacity is related to suction conditions at inlet connection.

We reserve the right to alter technical information !