

Rotary Vane- Vacuumpump dry running




ZIRKON D008 V
0,25 kW (50 Hz)
0,30 kW (60 Hz)

Motor: Protection Class IP 55; Insulation Class F

	article code	kW	V	Hz	min ⁻¹	m ³ /h	mbar ,abs	dB(A)	kg
Single Phase	5098010081	0,25	220-240 ~	50	2800	8,0	150	60	8,5
		0,30	220-240 ~	60	3300	9,5	150	62	8,5
Three Phase	5098010320	0,25	175-260 △ 300-450 Y	50 50	2800	8,0	150	60	7,5
		0,30	200-300 △ 346-520 Y	60 60	3300	9,5	150	62	7,5

Dimensions


all dimensions in mm

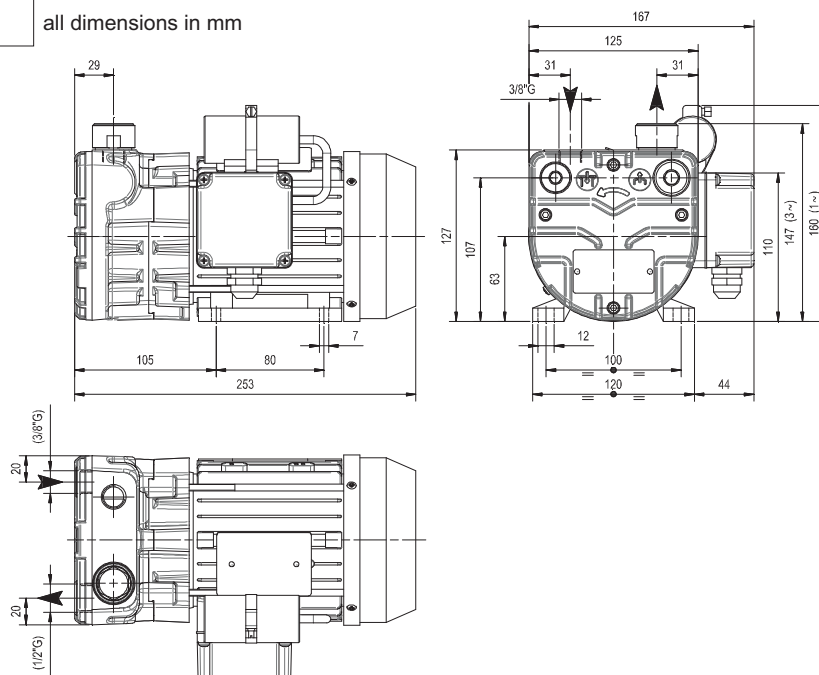

We reserve the right to alter technical information!

briwatec GmbH
Schönauer Strasse 62
D-79669 Zell im Wiesental

Phone +49 (0) 7625 918 868 0
Fax +49 (0) 7625 918 868 33
Email: info@briwatec.de
<http://www.briwatec.de>

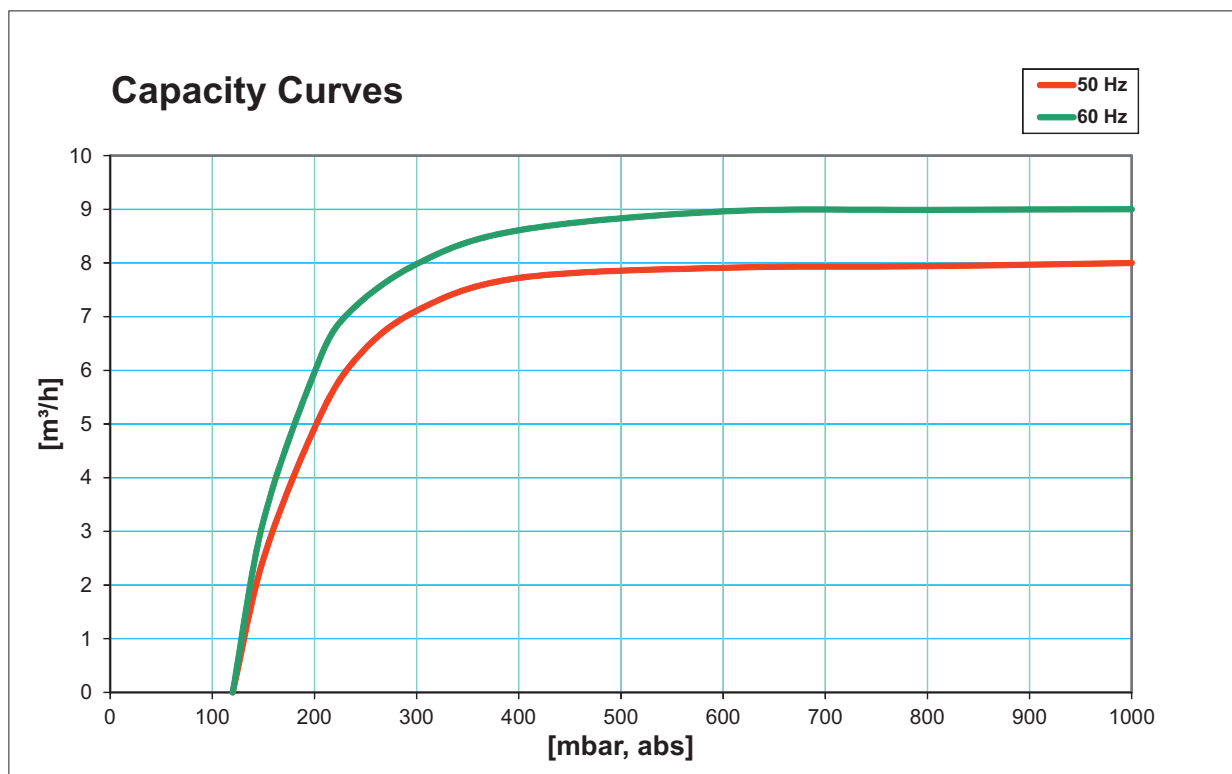

The capacity is related to suction conditions at inlet connection.

We reserve the right to alter technical information!