

Rotary Vane- Vacuumpump oil lubricated



TOPAS D020 V

0,75 kW (50 Hz)

0,90 kW (60 Hz)

Motor: Prot. Cl. IP 55; insulation Cl. F



	article code	kW	V	Hz	min ⁻¹	VOL (m ³ /h)	mbar ,abs	dB(A)	Oil (l)	kg
Single Phase	5096010661	0,75	220-240 ~	50	2860	20	2	64	0,5	19
	5096010661	0,90	220-240 ~	60	3400	24	2	67	0,5	19
Three Phase	5096010660	0,75	175-260 △ 300-450 Y	50	2680-2870	20	2	64	0,5	17
	5096010660	0,90	200-300 △ 346-520 Y	60	3220-3440	24	2	67	0,5	17

* without gas ballast

** with gas ballast

Dimensions

all dimensions in mm

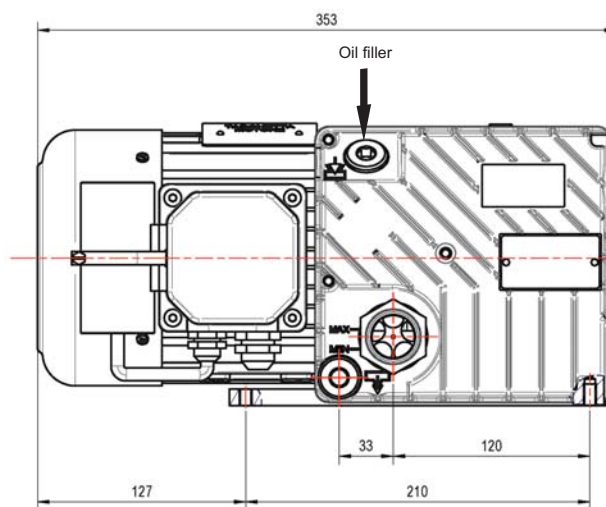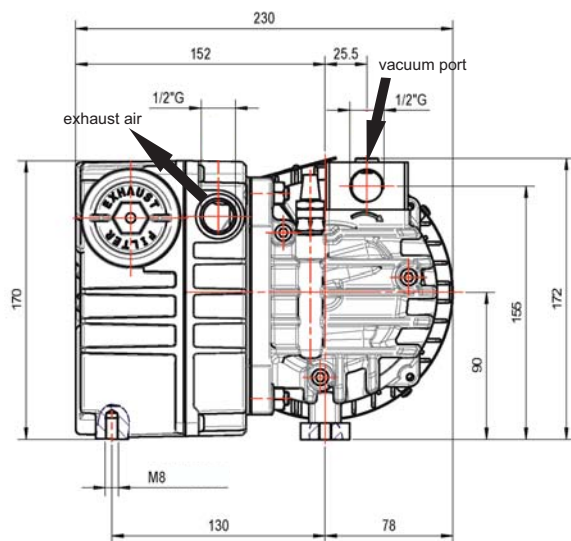


We reserve the right to alter technical information !

briwatec GmbH
Schönauer Strasse 62
D-79669 Zell im Wiesental

Phone +49 (0) 7625 918 868 0
Fax +49 (0) 7625 918 868 33
Email: info@briwatec.de
<http://www.briwatec.de>

TOPAS D020 V

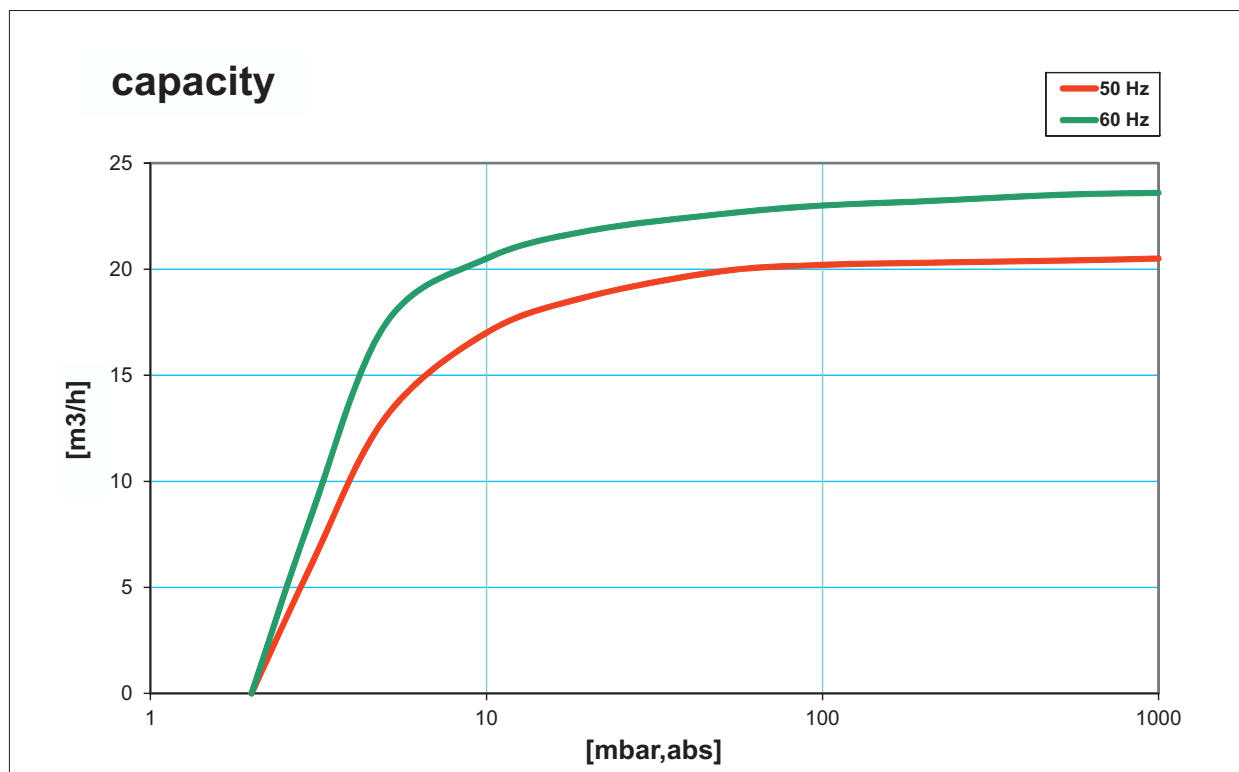

The capacity is related to suction conditions at inlet connection.

We reserve the right to alter technical information !