

Rotary Vane- Vacuumpump oil lubricated



TOPAS E066 V

1,50 kW (50 Hz)

1,80 kW (60 Hz)

Motor: Prot. Cl. IP 55; insulation Cl. F; IE3

article code	kW	V	A	Hz	min ⁻¹	m ³ /h	mbar _{abs} *	mbar _{abs} **	dB(A)	Öl(l)	kg
3082424700	1,50	230△ 400 Y	#	50 50	1500	68	0,1	1,5	67	3	64
3082425500	1,80	208-230△ 460 Y	#	60 60	1800	82	0,1	1,5	72	3	79


* without gas ballast

on request

** with gas ballast

Dimensions


all dimensions in mm

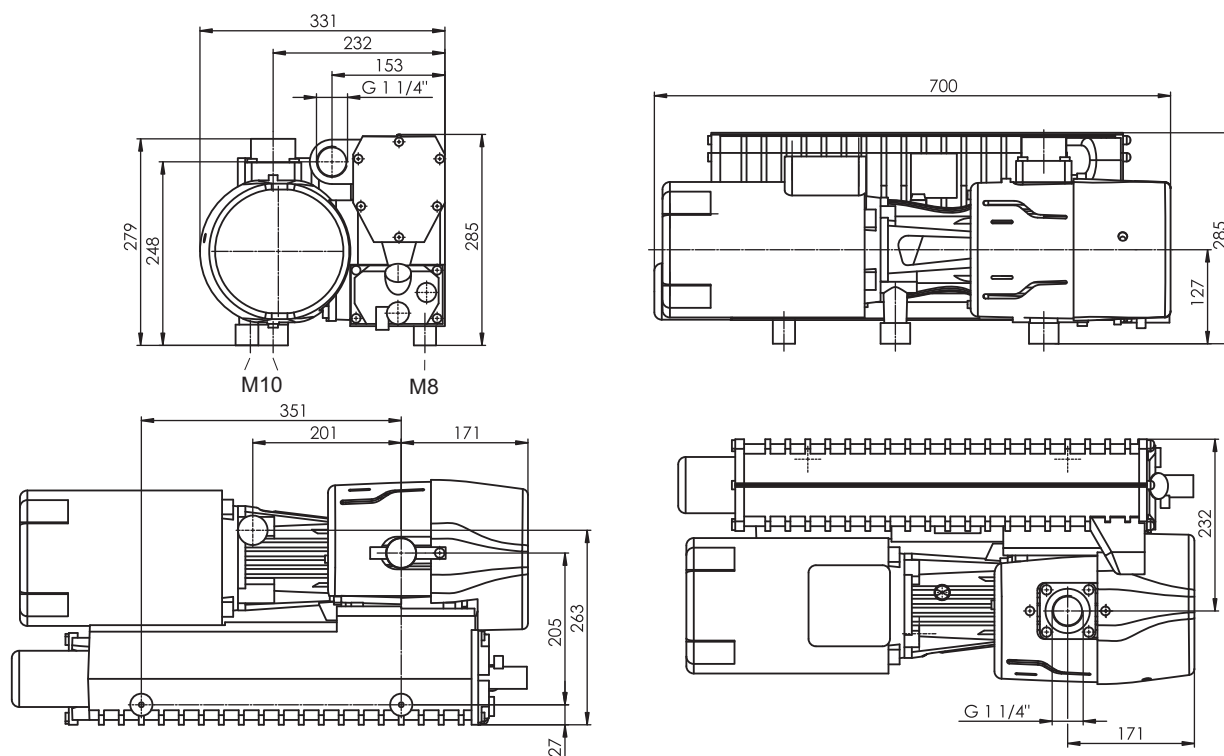

We reserve the right to alter technical information!

briwatec GmbH
Schönauer Strasse 62
D-79669 Zell im Wiesental

Phone +49 (0) 7625 918 868 0
Fax +49 (0) 7625 918 868 33
Email: info@briwatec.de
<http://www.briwatec.de>

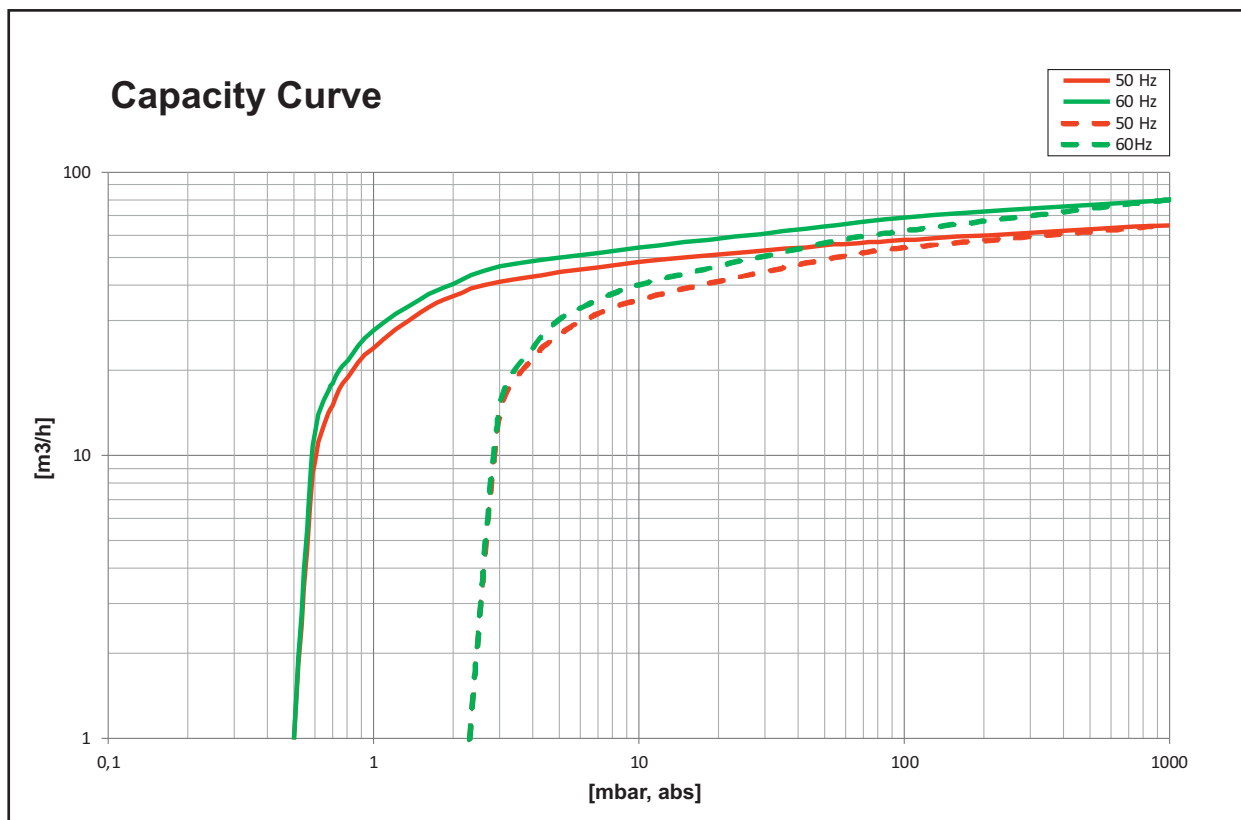

The capacity is related to suction conditions at inlet connection.

We reserve the right to alter technical information!