

## Check valve, M 5, PN 10, nickel-plated brass

### Item number:

RUCK 50 MSV



Example illustration

## Item description

### Materials:

Housing: Nickel-plated brass, spring: stainless steel, seal: NBR, valve plug: Brass (from G 3/8") POM)

### Temperature range:

-10°C to max. +95°C (M 5 to G 1/4": to max. +60°C)

### Optional:

FKM seal (-5°C up to max. +110°C) -V


## Properties

Version	Standard
G	M 5
L [mm]	25
D [mm]	HEX 8
PN [bar]	10
approx. opening pressure [bar]	0,2
Temperature range [°C]	-10 to +60

## Further information:

Weight	7,4 g / pcs
GTIN	4050571608675
Customs duty number	84813099
RoHS compliant	Yes

## Drawing:

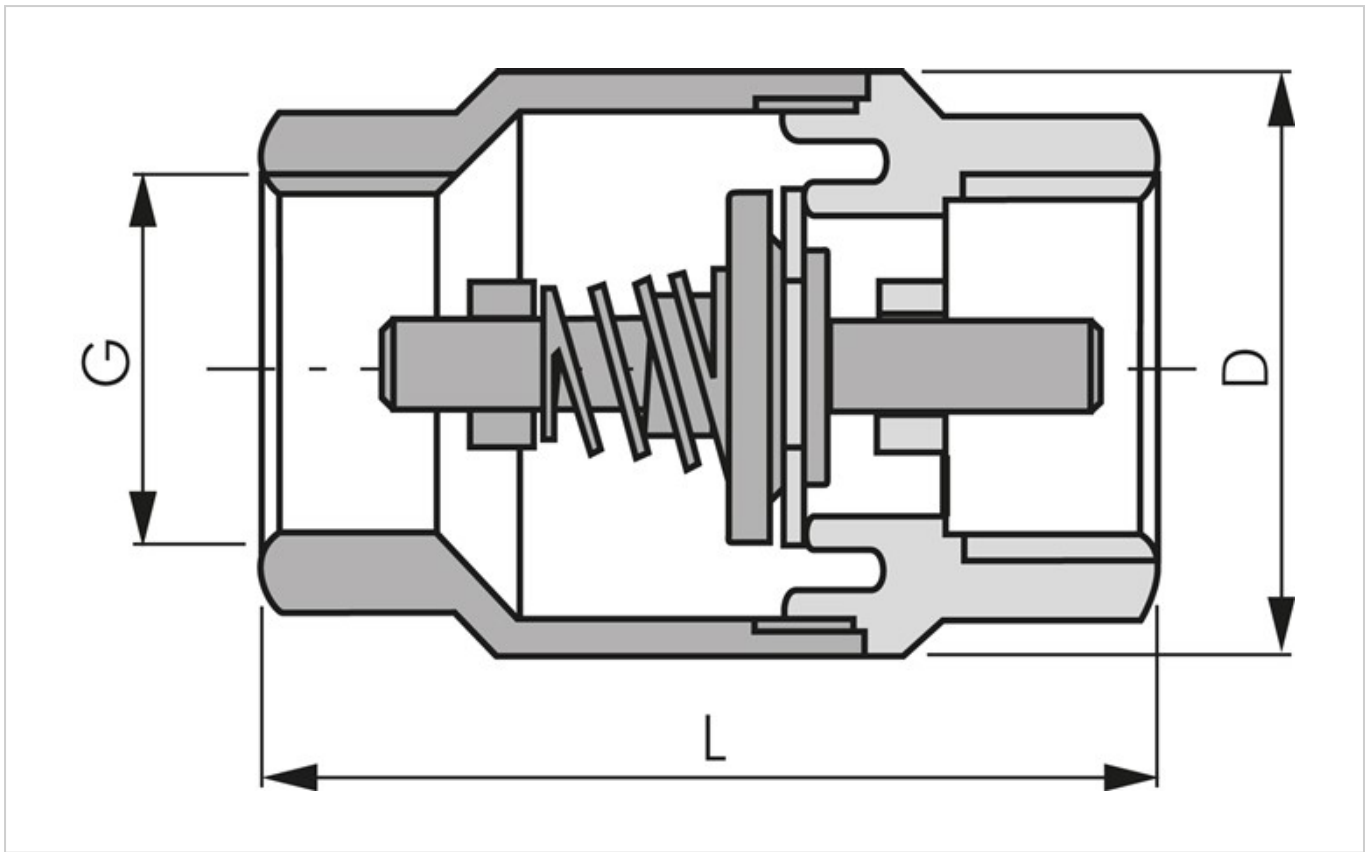

Drawing: Rückschlagventil

More information on this item and the process for ordering it can be found in our online shop  
<https://www.landefeld.de> under item number **RUCK 50 MSV**.

Landefeld Druckluft und Hydraulik GmbH · Konrad-Zuse-Straße 1 · 34123 Kassel · Germany

*All data are to be understood as non-binding reference values! We do not assume liability for any data selection not confirmed in writing. Unless otherwise specified, pressure values refer to liquids from Group II at +20°C.*

As of: 16.06.2023