


# AKXX

# Fixed Bearing Block




## 1. Features

- Two angular contact ball bearings in O-arrangement
- Sealing on both sides
- Flange with flexible ring to hold the ball bearings axially in position
- Square Nut with locking screw to fix.

## 2. Description

In the fixed bearing block, a spindle is held in position without play by the use of two angular contact ball bearings in an O arrangement. When clamping the bearings, only the end faces of the outer rings are in contact with each other due to the inserted spacer. This is the only way to ensure correct clamping. The bearings are clamped to the spindle with the fastening nut supplied. This prevents axial play. Sealing rings on both sides ensure that no lubricant can escape or dirt get into the bearing.

## 3. Mechanical Dimensions

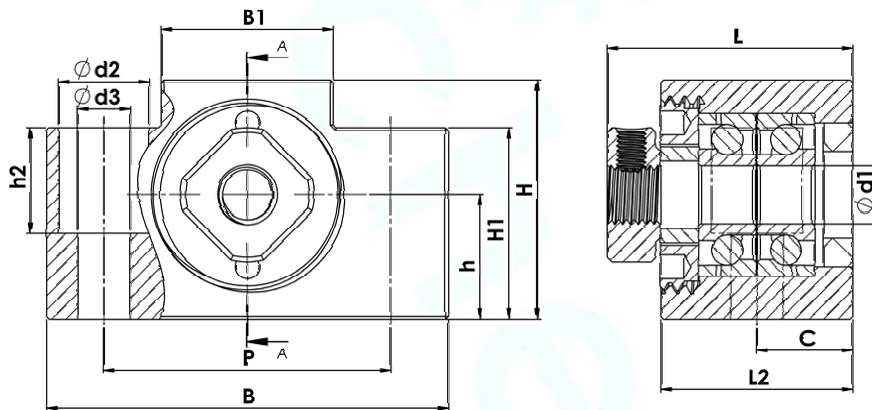

Art.No. 0510-003-	Name	Dimensions in mm												
		d1	B	L	H	d2	d3	h2	P	B1	H1	h	L2	C
0410	AK 06	6	45	27,5	25	9,5	5,5	11	30	18	20	13	20	10
0412	AK 08	8	52	30,5	32	10,6	6,6	10	38	25	26	17	23	11,5
Tolerances			+0	+0,3	+0,2	+0,2	+0,2	+0,2	+0,2	+0,2	+0,2	+0,02	+0,3	+0,2
			-0,5	-0,3	-0,2	-0,0	-0,0	-0,2	-0,2	-0,2	-0,2	-0,02	-0,3	-0,2

## 4. Scope of Delivery

- Bearing Block, preassembled with 2 angular contact ball bearings and flange for fixing
- Square Nut with clamping screw

## 5. Further Information

	Used Bearings	
AK06	2x 706	
AK08	2x 708	