


1. Well resistance under high speed conditions
2. low friction force under high speed conditions
3. water resistant

		HIWIN G04
Color		Beige
Base oil		Ester/PAO
Consistency enhancer		Lithium soap
Service temperature range (°C)		-35 to 120
NLGI grade		2
Viscosity (cst)	40°C	25
	100°C	6
Drop point (°C)		>225
4-ball test (ASTM D-2266)		418μm

	HIWIN G04	Other
Anti wear	○	△
Low friction	○	△
Service temperature range	○	○

4-ball test (ASTM D2266)

	Competitor's grease	HIWIN G04
Wear Scar		
Diameter (μm)	781	418

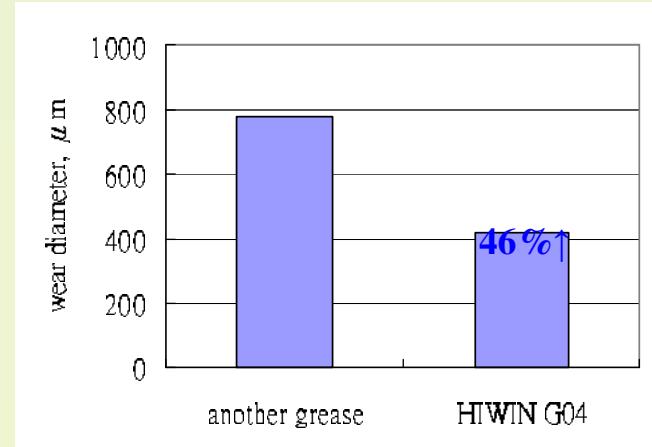

Motor driven voltage test

